



LINEATIONS



Production method Tufting	Méthode de production Tuftée	Herstellungstechnik Getuftet	Productiemethode Getuft
Construction 1/10" Loop servo-scroll Bitumen + non woven	Construction 1/10" Loop servo-scroll Bitumen + voilé non tissé	Konstruktion 1/10" Loop servo-scroll Bitumen + Abdeckvlies	Constructie 1/10" Loop servo-scroll Bitumen + afdekvlies
Pile composition 100% PP Stainsafe®	Composition du velours 100% PP Stainsafe®	Florzusammenstellung 100% PP Stainsafe®	Poolsamenstelling 100% PP Stainsafe®
Pile weight Ca. 550 g/m²	Poids du velours Ca. 550 g/m²	Polgewicht Ca. 550 g/m²	Poolgewicht Ca. 550 g/m²
Total weight Ca. 4.300 g/m²	Poids totale Ca. 4.300 g/m²	Gesamtgewicht Ca. 4.300 g/m²	Totaal gewicht Ca. 4.300 g/m²
Pile height Ca. 5 mm	Hauteur du velours Ca. 5 mm	Florhöhe Ca. 5 mm	Poolhoogte Ca. 5 mm
Tuft density Ca. 189.120/m²	Nombre de touffes Ca. 189.120/m²	Noppenzahl Ca. 189.120/m²	Aantal noppen Ca. 189.120/m²
Total height Ca. 7 mm	Hauteur totale Ca. 7 mm	Gesamthöhe Ca. 7 mm	Totale hoogte Ca. 7 mm
Size 50 x 50 cm	Dimensions 50 x 50 cm	Abmessung 50 x 50 cm	Afmetingen 50 x 50 cm
Wrapping 5 m²	Emballage 5 m²	Verpackung 5 m²	Verpakking 5 m²
Antistatique < 2 kV	Antistatique < 2 kV	Antistatisch < 2 kV	Antistatisch < 2 kV
Fire class C _{fl} -s1 (EN 13501-1) Centexbel 0493-CPR-0130	Classement feu C _{fl} -s1 (EN 13501-1) Centexbel 0493-CPR-0130	Brandverhaltensklasse C _{fl} -s1 (EN 13501-1) Centexbel 0493-CPR-0130	Brandklasse C _{fl} -s1 (EN 13501-1) Centexbel 0493-CPR-0130
Fastness to light 5-6	Solidité à la lumière 5-6	Lichtechtheit 5-6	Lichtechtheid 5-6
Water fastness 4-5	Solidité à l'eau 4-5	Wasserechtheit 4-5	Waterechtheid 4-5

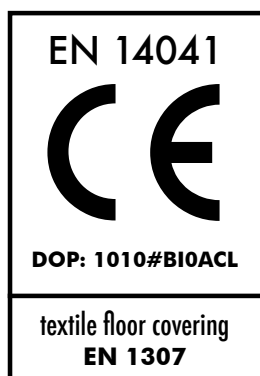

MAINTENANCE: Spillage should be taken up promptly and surface stains removed by an appropriate method as soon as possible. In heavy traffic areas the carpet should be cleaned daily with a vacuum cleaner. Periodic maintenance should be carried out by professional cleaning staff using appropriate extraction systems. COLOUR MARCHING: As with all textile products there will be a variance in shade from batch to batch. Any samples supplied are as close a representation to the actual carpet as the production process will allow. An exact colour match between different dye batches cannot be guaranteed.

Balta Tiles • Zevensterrestraat 21 • B-9240 Zele • Tel. +32 (0)52 45 72 11 • Fax +32 (0)52 44 90 99 • info@baltagroup.com • www.baltagroup.com